


# 35 Amp Micro ISO Automotive Plug In / PCB

**PC782**

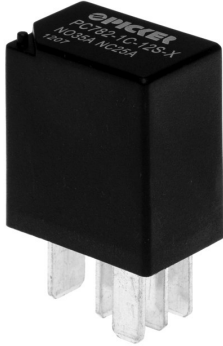

## FEATURES

- Micro Size Plug-in Design
- 1A (SPST-NO) and 1C (SPDT) Contact Forms Available
- Contact Switching Capacity up to 35 Amps
- 125°C Operating Temperature
- PC Board Version Available
- See SC782 for Available Sockets
- Internal Diodes or Resistors Available
- RoHS Compliant
- Fully Automated Assembly

## CONTACT RATINGS 14 VDC at 25°C

Contact Form	1 Form A (SPST-NO)	1 Form C (SPDT)	
	Normally Open	Normally Open	Normally Closed
Max Switching Current	Make 105 A <sup>(1)</sup>	Make 90 A <sup>(1)</sup>	Make 35 A <sup>(1)</sup>
	Break 35 A	Break 30 A	Break 30 A
Max Continuous Current	35 A @ 25°C	20 A @ 25°C	30 A @ 25°C
	25 A @ 85°C	15 A @ 85°C	20 A @ 85°C
Max Switching Voltage	75 VDC		
Max. Switching Power	490 W		

## CONTACT RATINGS 28 VDC at 25°C

Contact Form	1 Form A (SPST-NO)	1 Form C (SPDT)	
	Normally Open	Normally Open	Normally Closed
Max Switching Current	Make 52 A <sup>(1)</sup>	45 A <sup>(1)</sup>	17.5 A <sup>(1)</sup>
	Break 12.5 A	Break 15 A	Break 15 A
Max Continuous Current	17.5 A @ 25°C	10 A @ 25°C	15 A @ 25°C
	12.5 A @ 85°C	7.5 A @ 85°C	10 A @ 85°C
Max Switching Voltage	75 VDC		
Max. Switching Power	490 W		

## CHARACTERISTICS

Operate Time	7 msec max.
Release Time	2 msec max
Insulation Resistance	100 MΩ Min at 500VDC
Dielectric Strength	500 V 50 Hz Between Contacts
	1000 V 50 Hz Between Contact and Coils
Shock Resistance	100 m/s <sup>2</sup> 11ms
Vibration Resistance	10 Hz—40 Hz Double Amplitude 2.7 mm
Terminal Strength	8N 4N (PC type)
Power Consumption	1.2 W (1A), 1.5 W (1C)

## CONTACT DATA

Material	AgSnO <sub>2</sub>	
Initial Contact Resistance	50 mΩ Max	
Service Life	Electrical	1 x 10 <sup>5</sup> Operations
	Mechanical	1 x 10 <sup>7</sup> Operations

## CHARACTERISTICS Continued

Solderability	255°C ± 2°C 3 s ± 0.5 s
Operating Temperature Range	- 40 to 125°C
Storage Temperature Range	- 40 to 155°C
Weight	18.5 grams

<sup>(1)</sup>With current load applied for a maximum of 3 seconds at a maximum duty cycle of 10%.

## ORDERING INFORMATION

Example:	PC782	-1C	-P	-12	S	-R	-X
Model:	<b>PC782</b>						
Contact Form:	1A: 1 Form A (SPST-NO) 1C: 1 Form C (SPDT)						
Mounting Version:	Nil: Plug-In; P: PCB						
Coil Voltage:	6: 6 VDC; 12: 12 VDC; 24: 24 VDC; 48: 48 VDC						
Enclosure:	C: Dust Cover, S: Sealed Case						
Parallel Component:	Nil: None; D: Diode, R: Resistor						
RoHS Compliant:	-X						

See SC782 for Available Sockets

Box Quantity: 1,000; Inner Box: 500


**COIL DATA**

Coil Voltage (VDC) <sup>(2)</sup>		Coil Resistance (Ohms ± 10%)		Must Operate Voltage Max (VDC) <sup>(3)</sup>	Must Release Voltage Min. (VDC) <sup>(3)</sup>
Rated	Max	1.2 W	1.5 W		
6	7.8	30	24	4.2	0.6
12	15.6	120	96	8.4	1.2
24	31.2	480	384	16.8	2.4
48	62.4	1920	1536	33.6	4.8

**NOTES:**

- (2)The use of any coil voltage less that the rated voltage will compromise the operation of the relays.
- (3)Must Operate Voltage and Must Release Voltages are for test purposes only and are not to be used as design criteria.




**DIMENSIONS (mm/inches)**

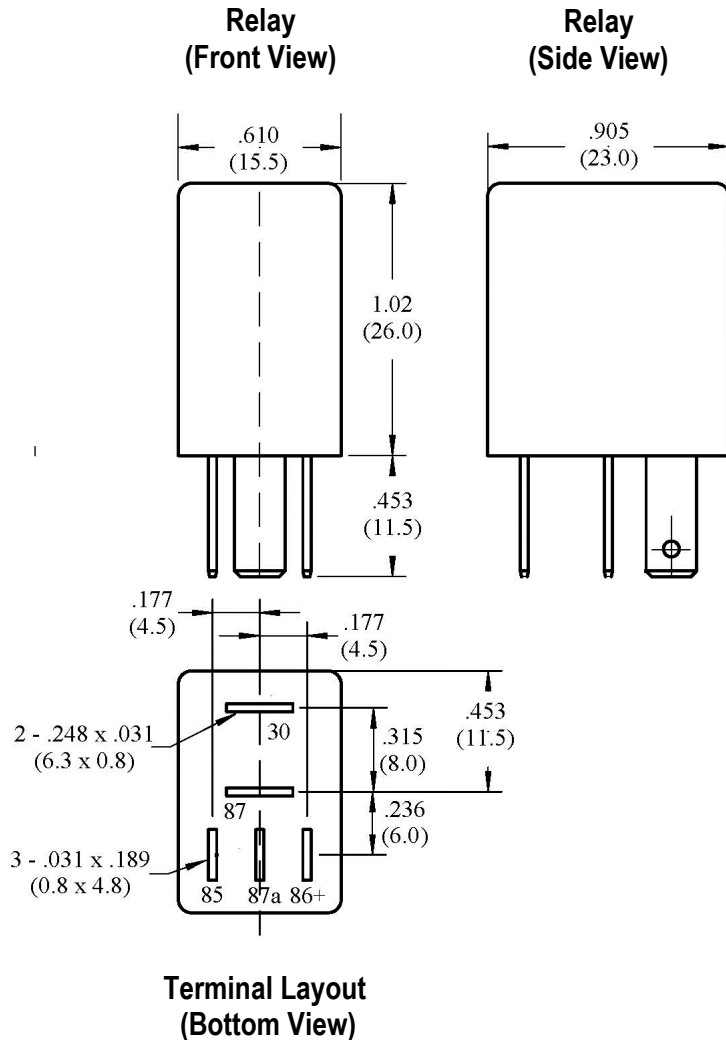

**Wiring Diagrams**

**Relay  
(Front View)**

**Relay  
(Side View)**

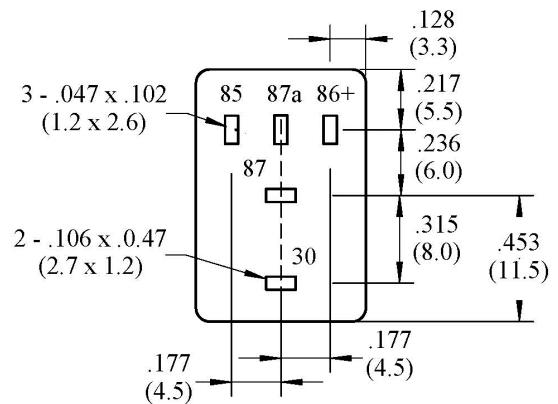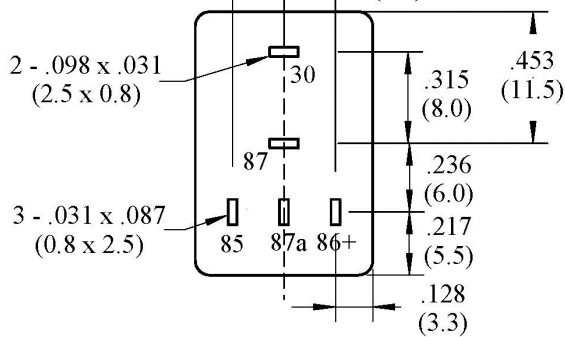
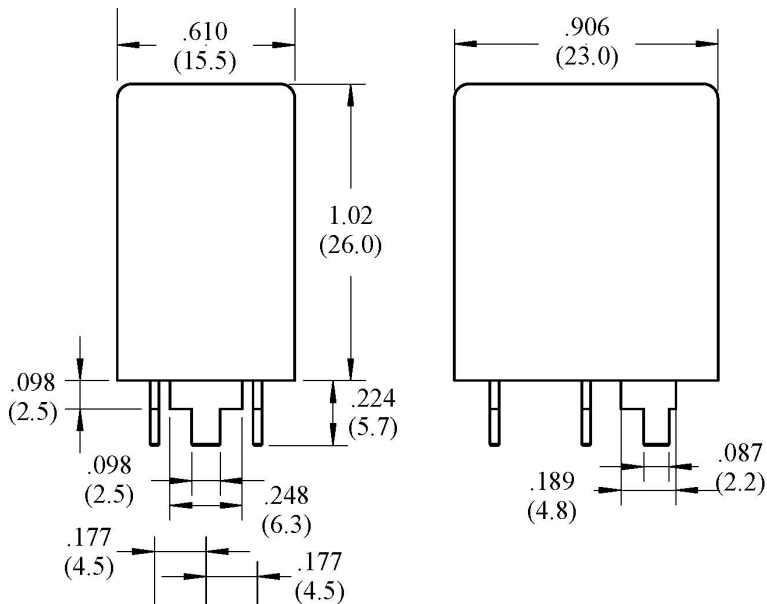


**Terminal Layout  
(Bottom View)**


**PC Board Layout  
(Top View)**

**Reference Data**

Contact Switching Capacity

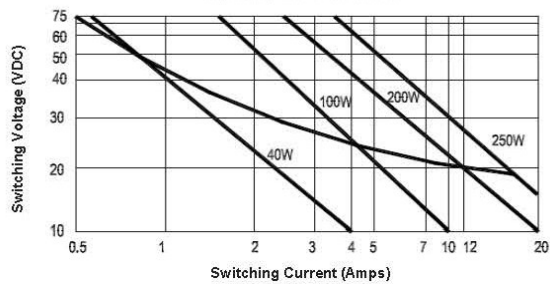

**1A (SPST-NO)**



**1C (SPDT)**

**Wiring Diagrams**

Internal Diode Shown for Example Only