

# AC Input Solid State Relay PCS34 AC Input



### FEATURES

- High Power, Load Currents from 40 to 80 Amps
- Back to Back SCR Design Output
- Dielectric Strength of 4,000 VAC
- Zero Cross or Random Turn-On
- Panel Mount
- AC Input Control
- Optical Isolation Between Input and Output
- RoHS Compliant



### INPUT PARAMETERS (Ta = 30°C)

Control Voltage Range	90 VAC to 280 VAC
Must Turn-On Voltage	90 VAC
Must Turn-Off Voltage	10 VAC

### UL Life Testing

Model: PCS34-A-240A-40-xxx

Load Type	Load Voltage	Output Current
Resistive 100k Cycles	280 VAC 50/60 HZ	50 Amps at 30°C

### OUTPUT PARAMETERS (Ta = 30°C)

Load Current Range	40 A	50 A	60 A	70 A	80 A	100 A
Max. Surge Current (10 ms)	400 A	500 A	600 A	700 A	800 A	1000 A
Max. I²t (10 ms A²s)	800 A	1250 A	1800 A	2450 A	3200 A	3200 A

### OUTPUT PARAMETERS Continued

	240A	480A
Load Voltage Range	48 - 280 VAC	48 - 530 VAC
Max. Transient Voltage	600 Vpk	1,200 Vpk
Max. Off-State Leakage	10 mA	
Max. On-State Voltage Drop	1.7 VRMS	
Min. Power Factor	0.5	
Max. Turn-On Time	20 ms	
Max. Turn-Off Time	40 ms	
Frequency Range	47 Hz to 63 Hz	
Min. Off-State dv/dt	500 V/us	

### CHARACTERISTICS

Dielectric Strength (50/60 Hz, 1 min)	4,000 VAC Input to Output
	2,500 VAC Input/Output to Base
Insulation Resistance	1000 MΩ at 500 VDC
Max. Capacitance	8pF (Input to Output)
Operating Temperature	- 30°C to 80°C
Storage Temperature	- 30°C to 100°C
Relative Humidity	45% - 85%
Weight	88g

### ORDERING INFORMATION

Example: PCS34 -A 240A -40 Z L

Model: **PCS34** (AC Input, AC Output)

Control Voltage: **A: 90-280VAC**

Load Voltage: **240A: 48-280VAC; 480A: 48-530VAC**

Load Current: **40: 40 Amp; 50: 50 Amps; 60: 60 Amp; 70: 70 Amp; 80: 80 Amp; 100: 100 Amp**

Switching Type: **Z: Zero Crossing, R: Random Turn-On**

Over Voltage Protection: **Nil: None, Y: With Varistor**

Status LED: Nil: Not Included, **L: Indicator LED**

Terminal Type **Nil: Screw Terminal Q: Quick Connect\* (1/4" Control, 3/8" Power)**


For Accessories and Heat Sink see page 3

Box Quantity: 100; Inner Box: 2

**PRECAUTIONS**

- 1) When choosing a SSR, note the actual load current and ambient temperature and reference the Characteristic Curves below.
- 2) SSR require a adequate heat sinking or other effective cooling measures.
- 3) With ambient temperature above 25°C refer to the curve of Max. Load Current vs Ambient Temperature for load current derating.
- 4) Apply heat-conducting silicon grease or a thermal transfer pad on the space between SSR and heat sink and screw the SCR firmly in to the heat sink to avoid damage from overheating.
- 5) Tighten the SSR terminal screws properly. We recommended screw installation torque as follows :  
 M4 screw mounting torque range is (0.98-1.37)N • m,  
 M3 screw mounting torque range is (0.56-0.98)N • m.  
 Lose screws will damage the SSR with heat generated from connections. Also, excessive screw torque may damage relays internal components.
- 6) It's recommended to use a heat sink matched to the Current Load. With any heat sink test that the SSR base temperature does not exceed 65°C.
- 7) When using the PCS34 relay with an inductive load, it is suggested to select random turn-on (i.e., a model with "R" letter).
- 8) The PCS34 is not suitable for capacitive loads; if you must then do not choose products with varistor protection (i.e., a model with "Y" letter).
- 9) Listed parameters are based on resistive loads. Do not use the relay beyond the described current, temperature, load or voltage limits as described in this data sheet.

**DIMENSIONS (mm)**

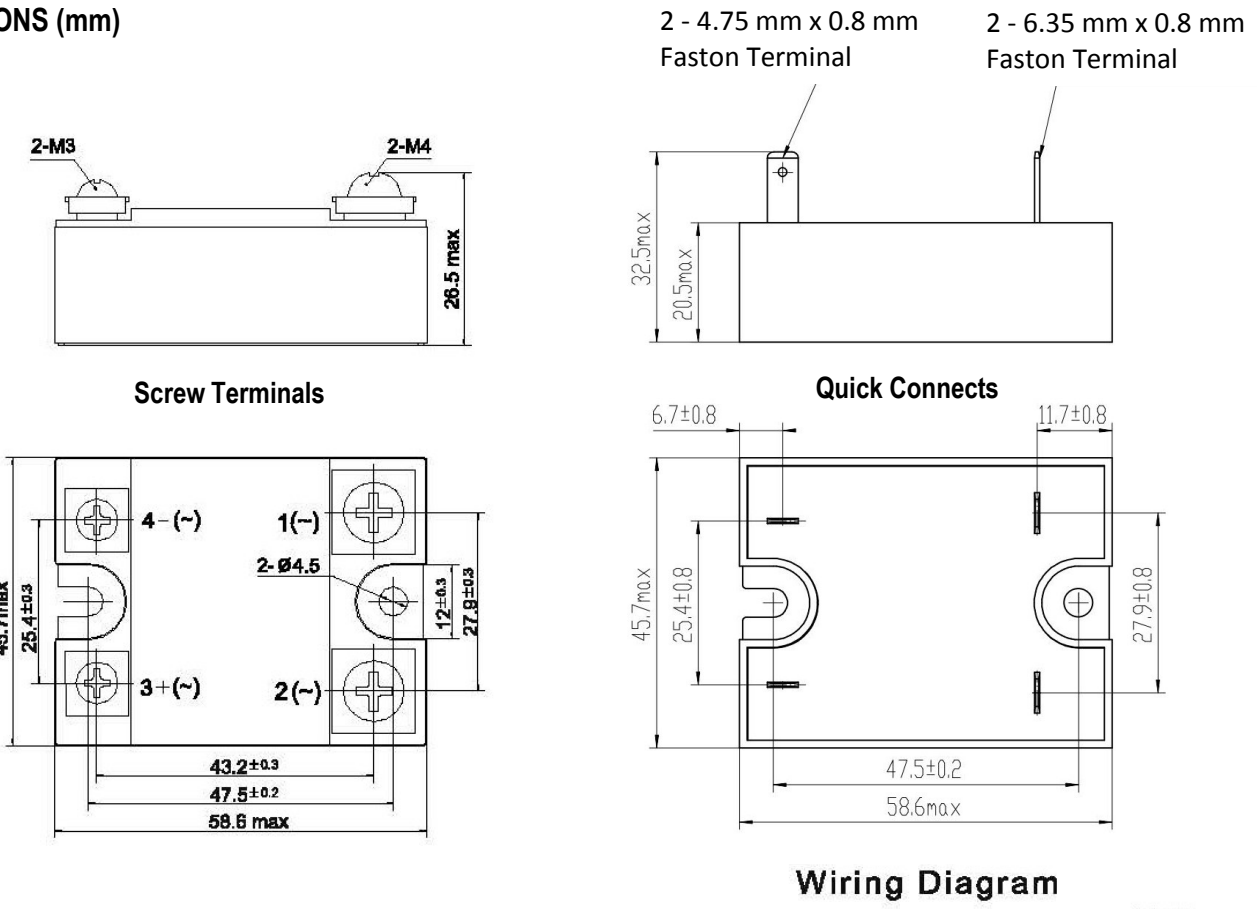


ACCESSORIES

Heat Transfer Pad	HTP100
Protective Cover	SSR100
Heat Sinks	PCH-I-50 for application up to 25 Amps @ 25°C Ambient Temperature
	PCH-H-110 for application up to 35 Amps @ 25°C Ambient Temperature
	PCH-H-150 for application up to 50 Amps @ 25°C Ambient Temperature


ACCESSORIES SOLD SEPERATELY

CHARACTERISTIC CURVES


Max. Load Current vs. Ambient Temperature (25A)

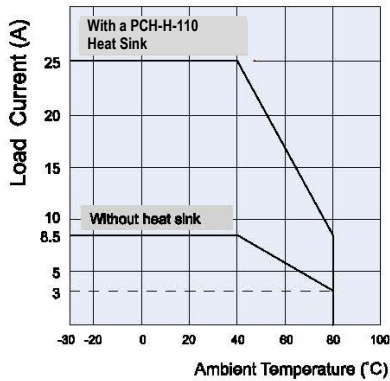


Max. Load Current vs. Ambient Temperature (40A)

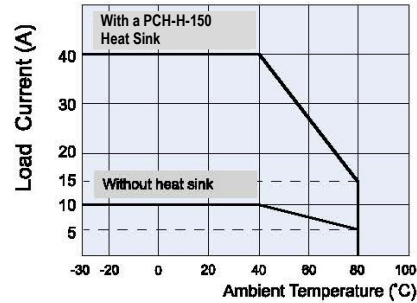


Max. Load Current vs. Ambient Temperature (50A)

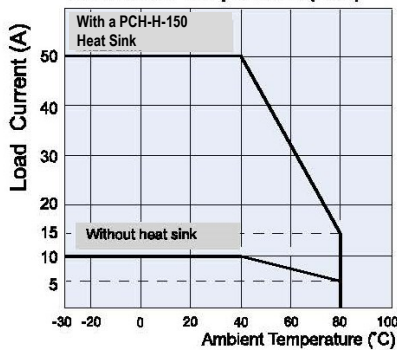


Max. Load Current vs. Ambient Temperature (60A)

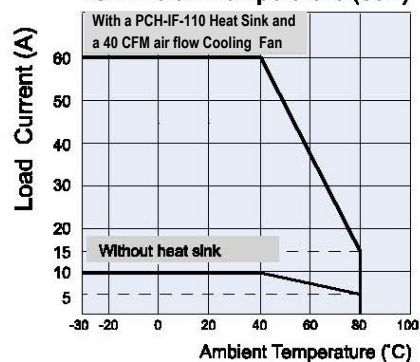

Max. Load Current vs. Ambient Temperature (70A)

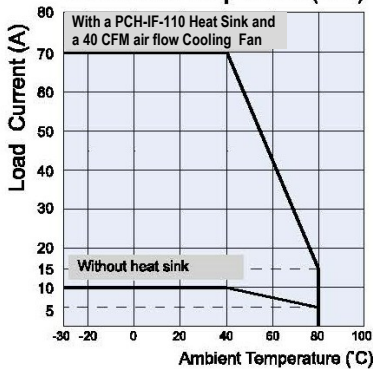

Max. Load Current vs. Ambient Temperature (80A)

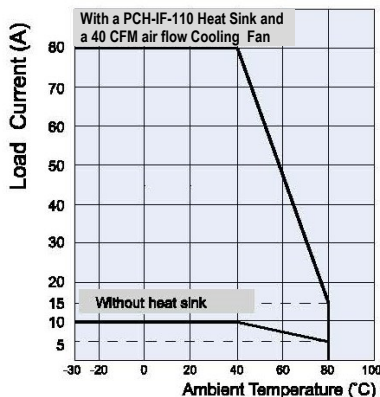

Max. Permissible Non-repetitive Peak Surge Current vs. Continuance Time

