

Miniature 12 & 20 Amp General Purpose Relay

PC113



FEATURES

- 1 and 2 Pole Contact Forms
- 12 & 20 Amp Switching Capacity
- AC & DC Coils Available
- Available as Plug In or PC Pins
- Available with Gold Plated Contacts
- UL Class B Insulation Standards
- Arc Barrier Equipped
- Available with Top Mounting Flange
- Compatible with SC113 Series Sockets
- RoHS Compliant



Load Type	Voltage	1 Form C (SPDT)	2 Form C (DPDT)
General Purpose	277 VAC	20 A	10 A
	250 VAC	20 A	12 A
	28 VDC	20 A	12 A
Motor	125 VAC	1/2 HP	1/2 HP
	250 VAC	1/2 HP	1/2 HP
Max. Switching Power		3,750 VA 420 W	3,000 VA 336 W

CONTACT DATA

Material		AgCdO (Silver Cadmium Oxide)
Initial Contact Resistance		50 milliohms max @ 0.1 A, 6 VDC
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	1 X 10 ⁵ Operations

CHARACTERISTICS

Operate Time	25 ms Max
Release Time	25 ms Max
Insulation Resistance	1,000 MΩ min (at 500 VDC)
Dielectric Strength	1,500 Vrms, 1 min. Between Coil and Contacts
	1,000 Vrms, 1 min. Between Open Contacts
	1,000 Vrms, 1 min. Between Contacts Poles
Shock Resistance	100 m/s ² 11 ms,
Power Consumption	1 & 2 Pole DC 0.9 W, AC 1.2 VA

CHARACTERISTICS CONTINUED

Vibration Resistance	10 Hz - 55 Hz DA 1.5 mm
Terminal Strength	8N; 4N PC Type
Solderability	255 °C ± 2°C 3 s ± 0.5 s
Pre-Heat	
Operating Temperature	-40 to 70 °C
Relative Humidity	85% (at 30°C)
Weight	37 grams

ORDERING INFORMATION

Example:	PC113	-1C	-P	-C1	-120A	-L	-X
Model:	PC113						
Contact Form:	1A (1U), 1B or 1C; 2A, 2B or 2C						
Terminal Type:	Nil: Solder Lugs; P: PC Pins						
Case Type:	Nil: Plain Case; C1: Flange Mount Case						
Coil:	XXXA: AC Coil 6, 12, 24, 36, 48, 120, 220, 240; XXXD: DC Coil 6, 12, 24, 36, 48, 110, 220						
Options:	Nil: None; G: Gold Plate Contacts; L: LED Indicator; D: Internal Diode						
RoHS Compliant:	-X: RoHS Compliant						

See SC113-2C for Available Plug-In Socket
See SC113-2C-PCB for Available Pin Socket

Note: LED polarity is positive on terminal 8 and negative on terminal 7

Box Quantity: 500; Inner Box: 250

COIL DATA


Voltage Type	Coil Voltage		Resistance Ohms ± 10%	Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)
	Coil Power	Rated			
DC 0.9 W		6	40	4.8	0.6
		12	160	9.6	1.2
		24	650	19.2	2.4
		36	1,440	28.8	3.6
		48	2,600	38.4	4.8
		110	11,000	88.0	11.0
		220	53,778	176.0	22.0
AC 1.2 VA		6	11.5	4.8	1.8
		12	46	9.6	3.6
		24	184	19.2	7.2
		36	320	28.8	10.8
		48	735	38.4	14.4
		120	4,550	96.0	36.0
		220	14,400	176.0	66.0
		240	19,000	192.0	72.0

NOTES:

The use of any coil voltage less that the rated voltage will compromise the operation of the relays. Must Operate Voltage is listed for test purposes only and is not to be used as design criteria. Pickup and release voltages are for test purposes only and are not to be used as design criteria.

Dimensions are in mm, Inches are listed for reference only.

DIMENSIONS (mm/inches)

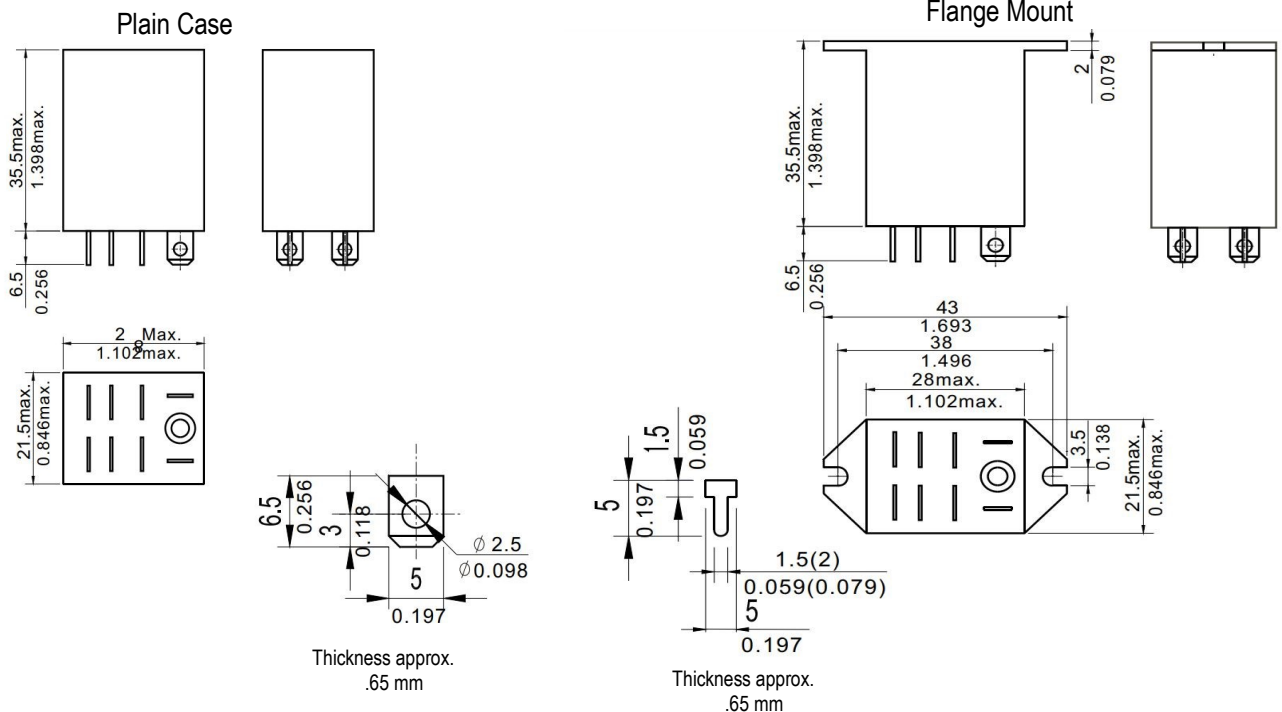

3220 Commander Drive, Suite 102 Carrollton, TX 75006
 Sales: (972) 713-6272 (888) 997-3933


www.PickerComponents.com
 e-mail:sales@pickercomponents.com

Dimensions are listed for reference purposes only.

Fax: (972)735-096

Specifications and Availability subject to change without notice.

DIMENSIONS (mm/inches)

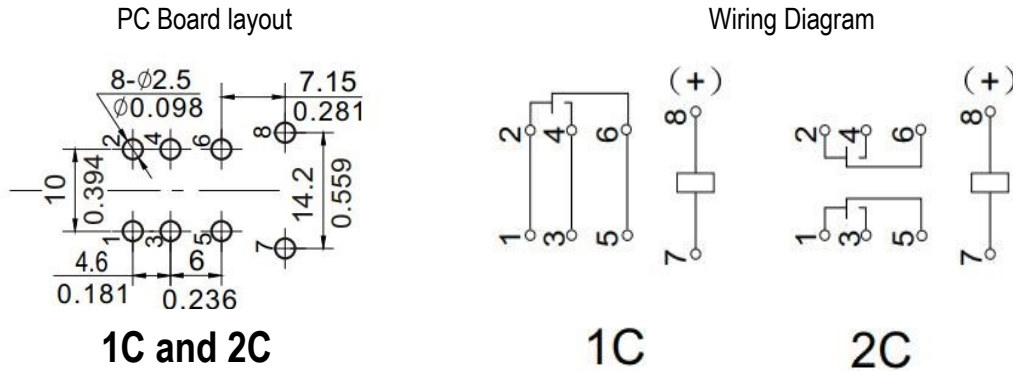

NOTES 1).Dimensions are in millimeters.
 2).Inch equivalents are given for general information only.

Reference Data

