


Low Profile PCB Power Relay









PC375

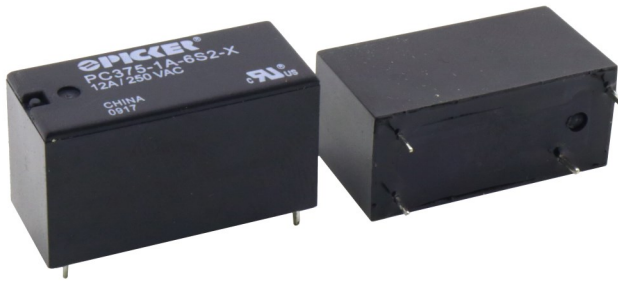

FEATURES

- Up to 16 Amp Continuous Contact Capacity
- Four Versions
- 5 KV Dielectric Strength Between Coil and Contacts
- Meets UL 873 Spacing
- Class F Material Standard
- 85°C Operating Temperature
- RoHS Compliant

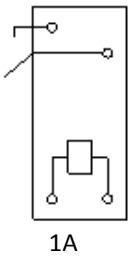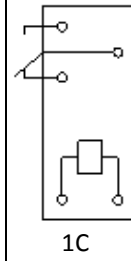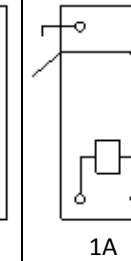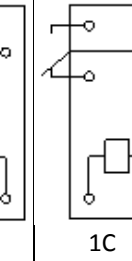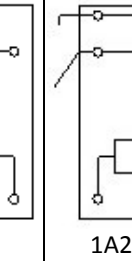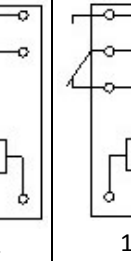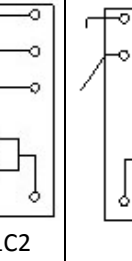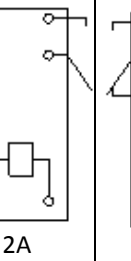

Version	1		2		3		4*	
Form	1A SPST	1C SPDT	1A SPST	1C SPDT	1A2 SPST	1C2 SPDT	2A DPST	2C DPDT
Number of Pins	4	5	4	5	6	8	6	8
Contact Pin Spacing	3.5 mm	3.5 mm	5.0 mm	5.0 mm	5.0 mm	5.0 mm	5.0 mm	5.0 mm
Wire Diag (Bottom View)								
General Purpose	12 A 250 VAC 12 A 30 VDC		12 A 250 VAC 12 A 30 VDC		NC: 12 A 250 VAC NO: 16 A 250 VAC		8 A 277 VAC 8 A 30 VDC	
Resistive	12 A 250 VAC 12 A 30 VDC		12 A 250 VAC 12 A 30 VDC		16 A 277VAC 16 A 277 VAC		8 A 277 VAC 8 A 30 VDC	
Coil Power	410 mW		410 mW		410 mW		410 mW	
Max Switching Current	20 A							
Max Switching Power	480 W 5,600 VA						2 x 150 W 2 x 1,800 VA	
Max Switching Voltage	440 VAC 125 VDC							

ORDERING INFORMATION

Example:

PC375	-1C	-12	S	2	-X
-------	-----	-----	---	---	----

Model:

PC375

Contact Form:

1A, 1C, 2A, or 2C

Coil Voltage (VDC):

5, 6, 9, 12, 24, 48, 110

Enclosure:

S: Sealed; C: Dust Cover

Version:

1: 1 Pole, 1A or 1C, 12 A, 3.5 mm; 2: 1 Pole, 1A or 1C, 12 A, 5 mm; 3: 1 Pole, 1A2 or 1C2, 16 A, 5 mm; 4*: 2 Pole, 2A or 2C, 8 A, 5 mm

Coil Sensitivity:

Nil: 410 mW

RoHS Compliant:

-X

Contact Material:

Nil: AgSnO₂

Insulation Material:

Nil: Class F

Box Quantity: 1000; Inner Box: 500

*Note: 12 & 24 VDC Coils Only

COIL DATA

Coil Voltage		Resistance (Ohms $\pm 10\%$)	Must Operate Voltage Max (VDC)	Must Release Voltage Min. (VDC)	Coil Power (mW)	Operate Time (mSec)	Release Time (mSec)
Rated	Max						
5	6.5	61	3.5	0.5	410	<15	<8
6	7.8	88	4.2	0.6			
9	11.7	198	6.3	0.9			
12	15.6	351	8.4	1.2			
24	31.2	1,405	16.8	2.4			
48	62.4	5,620	33.6	4.8			
60	78	8,780 $\pm 15\%$	42	6.0			
110	143	29,512 $\pm 15\%$	77	11.0			

NOTES:

The use of any coil voltage less than the rated voltage will compromise the operation of the relays. Must Operate Voltage is listed for test purposes only and is not to be used as design criteria. Pickup and release voltages are for test purposes only and are not to be used as design criteria.


CONTACT DATA

Material		AgSnO ₂
Initial Contact Resistance		50 m Ω max @ 1 A, 6 VDC
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	1 X 10 ⁵ Operations

CHARACTERISTIC


Operate Time	15 ms. Max.
Release Time	8 ms Max
Insulation Resistance	1,000 M Ω min, at 500 VDC, 50% RH
Dielectric Strength	5,000 V 50 HZ between coil and contacts 1,000 V 50 HZ between open contacts
Power Consumption	410 mW
Shock Resistance	10 g, 11 ms, functional; 100 g, destructive
Vibration Resistance	10 Hz - 55 Hz DA 2.0 mm
Terminal Strength	10N
Solderability	260°C for 5 seconds
Operating Temperature Range	Class F Material: -40°C to 85°C
Relative Humidity	85% (at 40°C)
Weight	12 grams MAX

DIMENSIONS

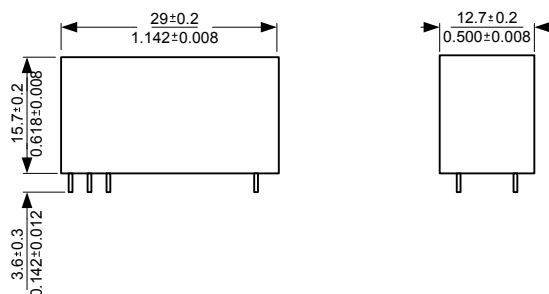


DIMENSIONS

Version 1

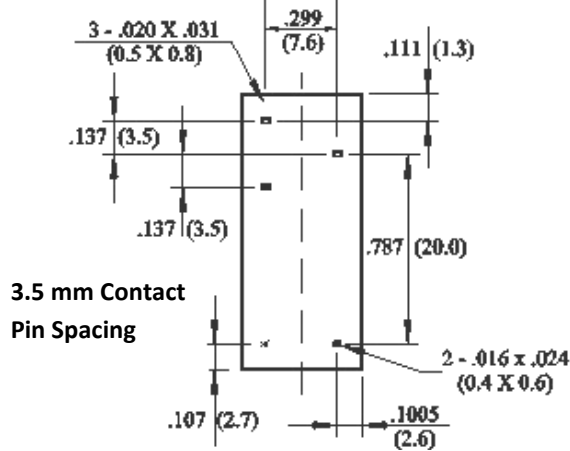


**3.5 mm Contact
Pin Spacing**

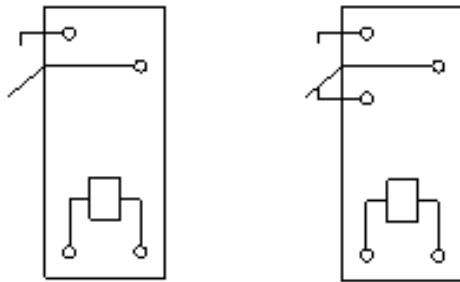


**1A
4 Pin**

**1C
5 Pin**

Version 2

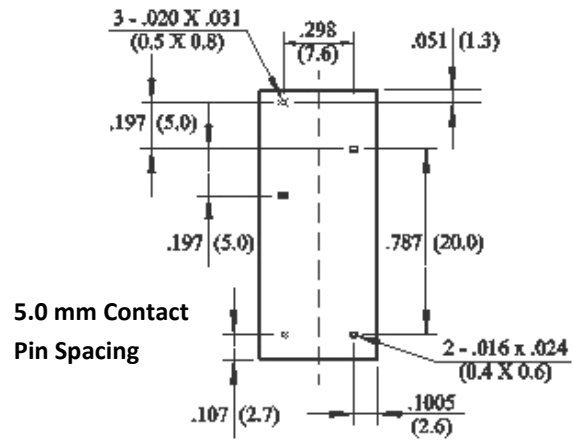


**5.0 mm Contact
Pin Spacing**

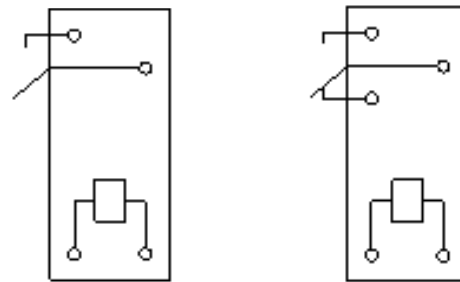


**1A
4 Pin**

**1C
5 Pin**

Version 3

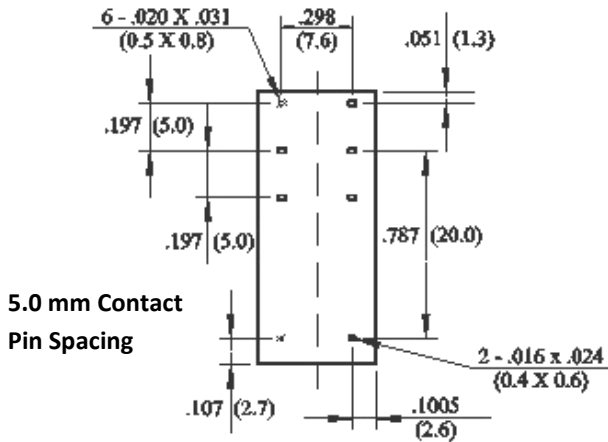


**5.0 mm Contact
Pin Spacing**

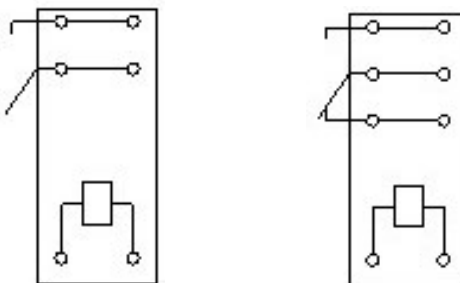


**1A2
6 Pin**

**1C2
8 Pin**

Version 4

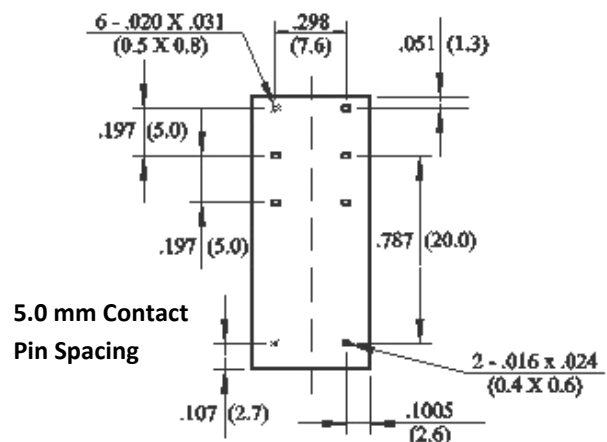

**5.0 mm Contact
Pin Spacing**

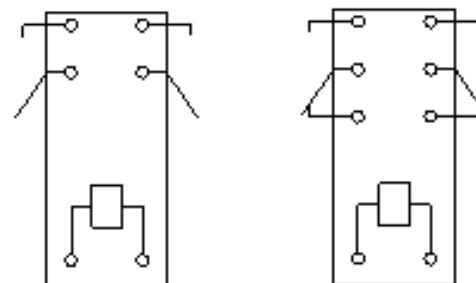

**2A
6 Pin**

**2C
8 Pin**