




COIL DATA

Coil Voltage (VDC)		Coil Power			Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)
		Resistance ohms $\pm 10\%$				
Rated	Max	360 mW	450 mW	600 mW		
3	3.9	25	20	15	2.25	0.3
5	6.5	69	55.6	42	3.75	0.5
6	7.8	100	80	60	4.50	0.6
9	11.7	225	180	135	6.75	0.9
12	15.6	400	320	240	9.00	1.2
24	31.2	1600	1280	960	18.0	2.4
48	62.4	6400	5120	3840	36.0	4.8


NOTES:

The use of any coil voltage less than the rated voltage will compromise the operation of the relays. Must Operate Voltage is listed for test purposes only and is not to be used as design criteria. Pickup and release voltages are for test purposes only and are not to be used as design criteria. Dimensions are in mm, Inches are listed for reference only.

DIMENSIONS (mm/inches)

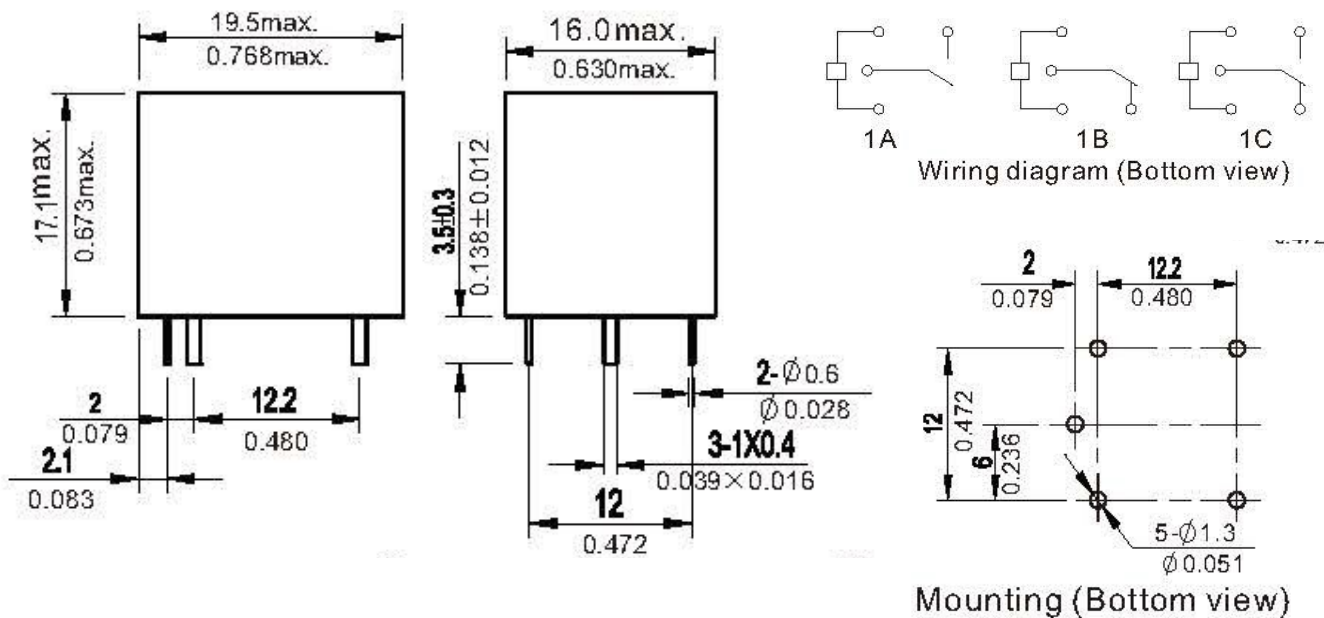

CHARACTERISTIC CURVES

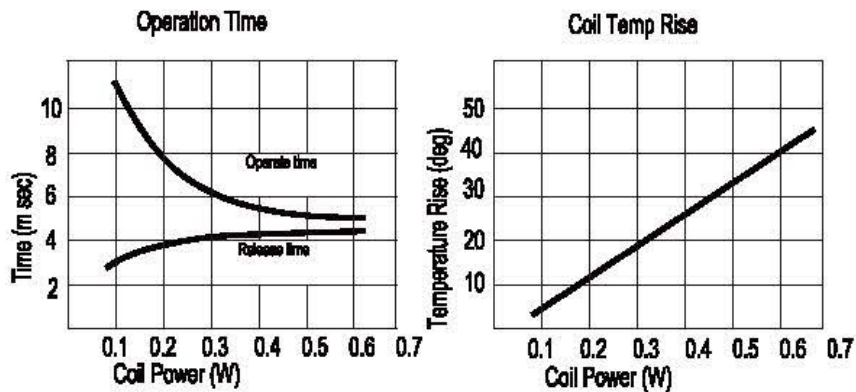

3220 Commander Drive, Suite 102 Carrollton, TX 75006  
 Sales: (972) 713-6272 (888) 997-3933

Fax: (972) 735-0964

www.PickerComponents.com  
 e-mail: sales@pickercomponents.com