

50/40 Amp Automotive Plug-In / PCB Mini ISO Relay - Ignition Protected

PC792E



FEATURES

- Ignition Protected* | SAE J1171 | UL 1500 | ISO 8846
- Most Popular Automotive Relay Footprint
- Contact Switching Capacity up to 150 Amps
- 50 Amps Continuous Carrying Current
- 125°C Operating Temperature
- Internal Diodes or Resistors Available
- >0.8 mm Contact Gap with 24 VDC
- Sockets Available

CONTACT RATINGS 14 VDC and 28 VDC AT 25° C

Contact Form	1 Form A		1 Form AA		1 Form B		1 Form C		1 Form U				
	SPST-NO		2-SPST-NO		SPST-NC		SPDT-NO		SPDT-NC		SPST-NO-DM		
Max Switching Current	14 VDC	Make 150 A ⁽¹⁾		Make 2 x 150 A ⁽¹⁾		Make 120 A ⁽¹⁾		Make 150 A ⁽¹⁾		Make 120 A ⁽¹⁾		Make 2 x 150 A ⁽¹⁾	
		Break 50 A		Break 2 x 50 A		Break 40 A		Break 50 A		Break 40 A		Break 2 x 50 A	
	28 VDC	Make 75 A ⁽¹⁾		Make 2 x 75 A ⁽¹⁾		Make 60 A ⁽¹⁾		Make 75 A ⁽¹⁾		Make 60 A ⁽¹⁾		Make 2 x 75 A ⁽¹⁾	
		Break 25 A		Break 2 x 25 A		Break 20 A		Break 25 A		Break 20 A		Break 2 x 25 A	
Max Continuous Current	14 VDC	50 A		2 x 50 A		40 A		50 A		40 A		2 x 25 A	
	28 VDC	25 A		2 x 25 A		20 A		25 A		20 A		2 x 15 A	
Max Switching Voltage	14 VDC	75 VDC											
	28 VDC	75 VDC											
Max. Switching Power	14 VDC	700 W											
	28 VDC	700 W											
Minimum Load	14 VDC	0.1A @ 12 VDC											
	28 VDC	0.1A @ 12 VDC											

⁽¹⁾With current load applied for a maximum of 10 milliseconds at a maximum duty cycle of 10%.

*Sealed with 6,9,12 or 24 VDC, 1.6 Watt Coil

ORDERING INFORMATION

Example:	PC792E	-1C	-C	-12	S	-R	N	-X
Model:	PC792E							
Contact Form:	1A, 1AA (1 Form 1 A with 2 #87 Terminals), 1B, 1C, or 1U (2 Form 1A with pins 87 and 87b isolated)							
Case Style:	C: Plug-In; C1: Plastic Bracket; P: PC Pins							
Coil Voltage:	6, 12, 24, 48							
Enclosure:	C: Dust Cover; S: Sealed; S1: Flux Tight ⁽²⁾							
Coil Power:	Nil: 1.6W ⁽³⁾ ; 1.9: 1.9W; 2.3: 2.3W; 2.6: 2.6W							
Parallel Component:	Nil: None; D: Diode; R: Resistor; DR: Diode and Resistor							
Terminal Plating:	Nil: PC Pin Version; N: Nickel Plated Terminals Standard on all Plug-In Models							
RoHS Compliant:	-X							


⁽²⁾ Flux Tight relays are constructed such that Flux will not enter the relay in an automated soldering process, they are NOT Suitable for water wash
⁽³⁾ 1.6W Industry Standard Coil

See SC792 for available sockets

Coil Options

Resistor Values (1/4 Watt):
 6V - 180 ohm
 12V - 680 ohm
 24V - 2,700 ohm
 Diode: 1N4005

Orientation of Optional Diode



*Contact Picker if You Require the Opposite Polarity or a Dual Diode

Box Quantity 400; Inner Box 100

COIL DATA

Coil Voltage (VDC)		Coil Power (W)				Must Operate Voltage Max (VDC)	Must Release Voltage Min. (VDC)
		Coil Resistance (Ohms ± 10%)					
Rated	Max	1.6 W**	1.9 W	2.3 W	2.6 W		
6	7.8	22.5	19.0	15.6	13.8	3.9	0.6
9	11.7	50.6	NA	NA	NA	5.9	0.9
12	15.6	90.0	75.8	62.6	55.4	7.8	1.8
24	31.2	360.0	303.2	250.4	221.5	15.6	2.4
48	62.4	1,440.0	NA	NA	NA	31.2	4.8

**1.6 W Industry Standard Coil

NOTES:

The use of any coil voltage less than the rated voltage will compromise the operation of the relays.
 Must Operate Voltage and Must Release Voltages are for test purposes only and are not to be used as design criteria.



CHARACTERISTICS

Operate Time	7 msec Typical
Release Time	5 msec Typical
Insulation Resistance	100 MΩ Min at 500VDC
Dielectric Strength	500 V 50 Hz Between Contacts 750 V 50 Hz Between Coil and Contact
Terminal Strength	8N 4N (PC type)
Shock Resistance	147 m/s ² 11ms
Vibration Resistance	10 Hz—40 Hz Double Amplitude 1.5 mm
Solderability	260°C for 5 seconds
Operating Temperature	- 40°C to 125°C
Storage Temperature	- 40°C to 155°C
Weight	31 grams, C1 36 grams
Power Consumption	1.6 W, 1.9 W, 2.3 W, 2.6 W


CONTACT DATA

Material	AgSnO ₂	
Initial Contact Resistance	30 mΩ Max	
Service Life	Electrical	1 x 10 ⁵ Operations
	Mechanical	1 x 10 ⁷ Operations


Orientation of Optional Diode




1A




1AA



1B




1C




1U

Wire Diagrams


DIMENSIONS in Inches/mm

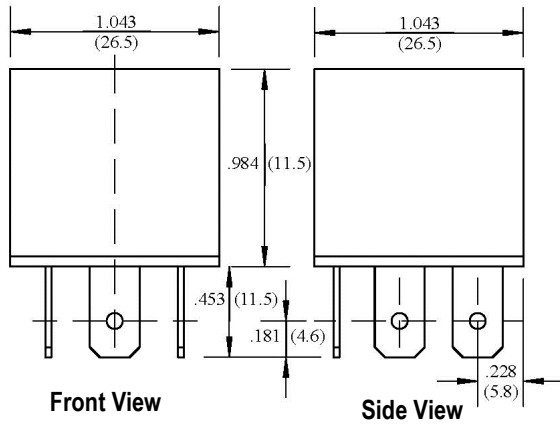


Relay (QC)

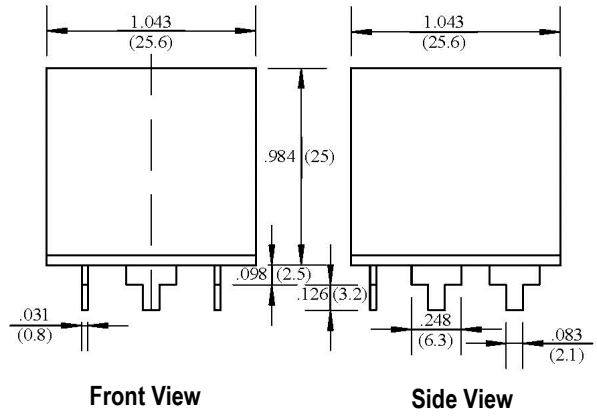


Relay (Pins)

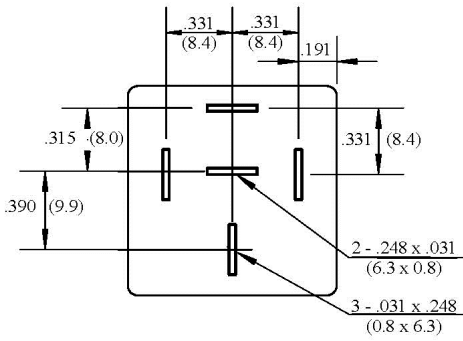


**Plug-In "C"
(Bottom View)**

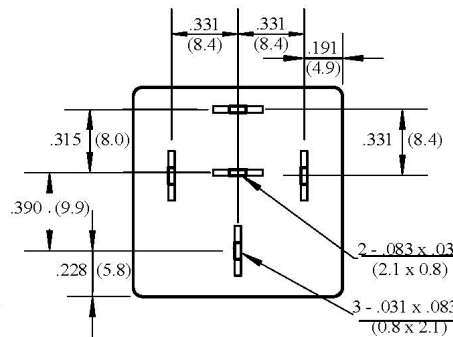

**PC Pins "P"
(Bottom View)**

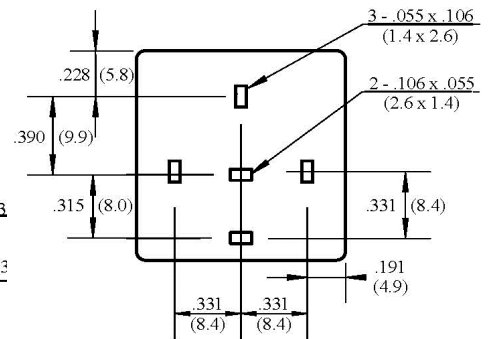

**PCB Board Layout
(Top View)**

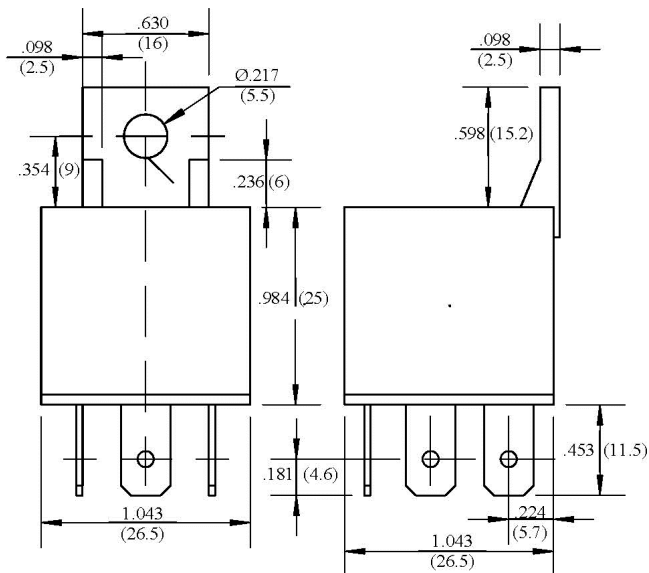

Plastic Bracket "C1"

**Plu
g In
"C"**