

Microminiature Surface Mount Signal Relay

PC304S



FEATURES

- 2,000 volt dielectric between coil and contacts
- 2,500 volt surge withstand
- Meets FCC Part 68 and Telecordia
- Meets EN60950 / EN41003
- Bifurcated contacts for high sensitivity
- Single & Dual coil latching available
- Sealed, immersion cleanable
- RoHS Compliant



File # E86876

UL/CSA RATINGS

Contact Form	2 Form C DPDT (bifurcated contacts)
Rated Load	2A at 30 VDC
Max. Operating Voltage	220 VDC
Max. Switching Power	60 W
Minimum Permissible Load	10 micro A, 10 mVDC

CONTACT DATA

Material	AgPd + Au (Silver Palladium + Gold Plate)	
Initial Contact Resistance	70 mOhm max @ 1mA, 20mV	
Service Life	Mechanical	1 X 10 ⁵ Operations
	Electrical	1 X 10 ⁸ Operations

COIL DATA

Type	Coil Voltage	Resistance ohms ± 10%	Must Operate Voltage Max. (VDC)	Release Voltage Or Reset Voltage	Maximum Voltage	Coil Power Consumption mW
Single Side Stable .140 W	3	64.3	2.25	0.3	6.0	140
	5	178	3.75	0.5	10	140
	6	257	4.50	0.6	12	140
	9	579	6.75	0.9	19	140
	12	1028	9.00	1.2	48	140
	24	2880	18.0	2.4	40.8	200
Single Coil Latching .100 W	3	90	2.25	-2.25	5.7	100
	5	250	3.75	-3.75	9.5	100
	6	360	4.50	-4.5	11.4	100
	9	810	6.75	-6.75	17.1	100
	12	1440	9.00	-9.00	22.8	100
	24	3840	18.0	-18.0	45.6	150
Dual Coil Latching .200 W	3	45	2.25	2.25	4.5	200
	5	125	3.75	3.75	7.5	200
	6	180	4.50	4.50	9.0	200
	9	405	6.75	6.75	13.5	200
	12	720	9.00	9.00	18.0	200
	24	1290	18.0	18.0	36.0	300

Note: Custom coil voltages within the ranges shown are available on special order.


ORDERING INFORMATION

Example:	PC304S	-12	-L1	-H	-X
Model					
Coil Voltage					
Type of Operation	Nil: Single Side Stable L1: Single Coil Latching; L2: Dual Coil Latching				
Type of Surface mount	Nil: Standard Surface Mount; H: High Connectivity Mount				
RoHS Compliant	Nil: Not RoHS, -X: RoHS Compliant				

CHARACTERISTICS

Type	Single Side stable	Single & Dual Coil Latching
Operate Time	Less than 4 ms at nominal coil voltage	N/A
Set Time	N/A	Less than 4 ms at nominal coil voltage
Release Time	Less than 4 ms at nominal coil voltage	N/A
Reset Time	N/A	Less than 4 ms at nominal coil voltage.
Insulation Resistance	1000 Mmegohms min. at 500 VDC, 50% RH	
Dielectric Strength	2000 V rms, 1 min. between coil and contacts and between adjacent parts 1000 V rms, 1 min. between open contacts	
Surge Strength	2500 V, between coil and contacts (FCC Part 68)	
Capacitance	0.4 pf max. between contacts; 0.2 pf max. between adjacent poles; 0.9 pf max. between coil and contacts	
Shock Resistance	Min 750 m/s ² (75 G)	
Vibration Resistance	10 - 55 Hz; 3.3 mm DA	
Allowable Max. Power Consumption at 20 C	0.4 W	
Ambient Temperature	-40 degrees C to 85 degrees C	
Power Consumption	0.1 to 0.14 W	
Weight	2 grams approx.	

**Dimensions in Inches (millimeters)
Drawings are 2X actual size**

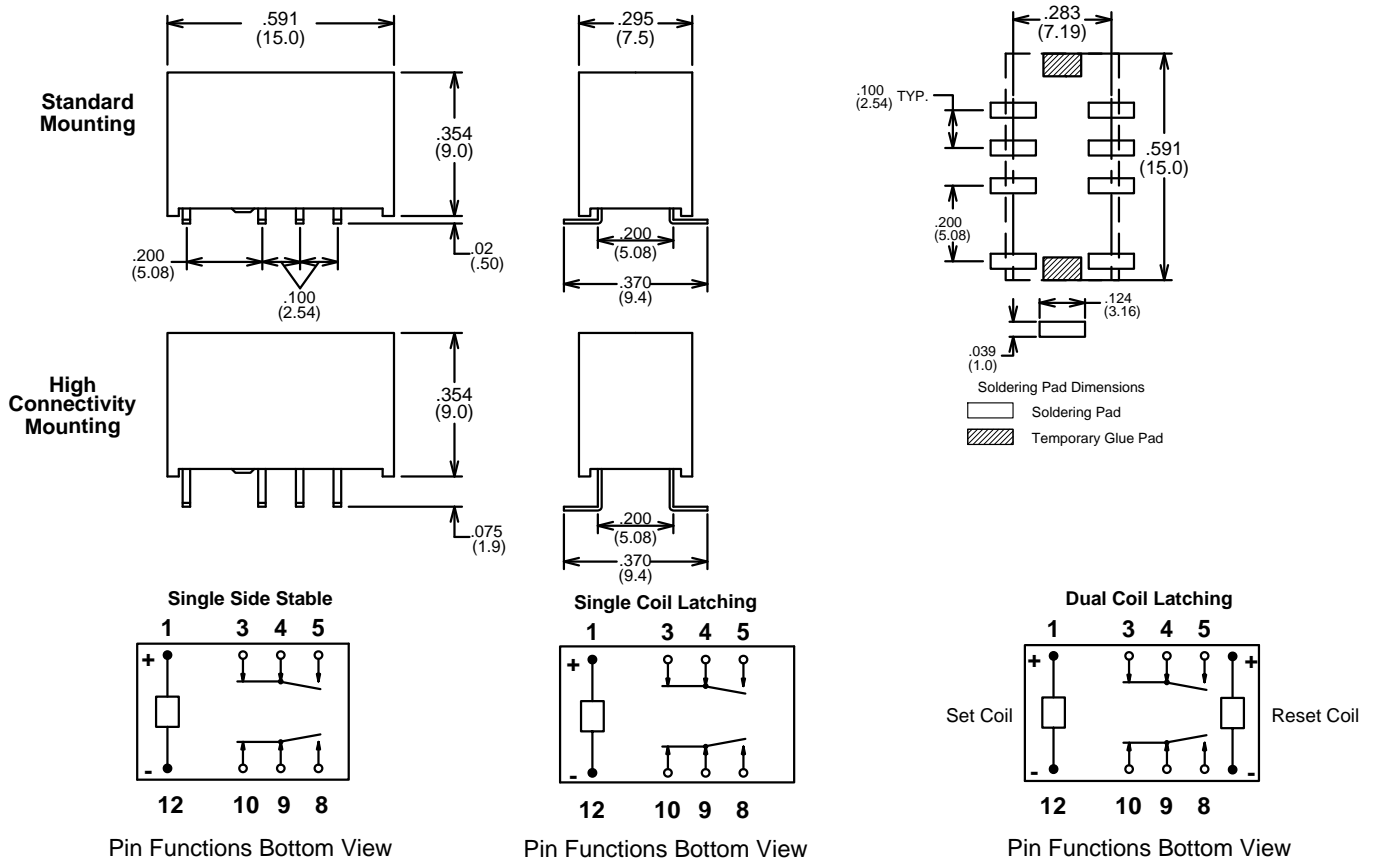

Notes:

Tolerances ± .010 unless otherwise noted
 On single coil latching set polarity shown



3220 Commander Drive, Suite 102, Carrollton, Texas 75006
 Sales: (888)997-3933 Fax: (818) 342-5296 email: sales@pickercomponents.com URL: pickercomponents.com